

Powered by

tuya[®]



Intelligence
Inside



P ROCEED SERIES

PROPER WORK LIGHTING CONSIDERS BOTH EMPLOYEE NEEDS
AND KEY LIGHTING STANDARDS.

PROCEED

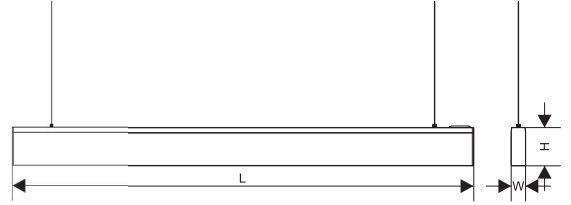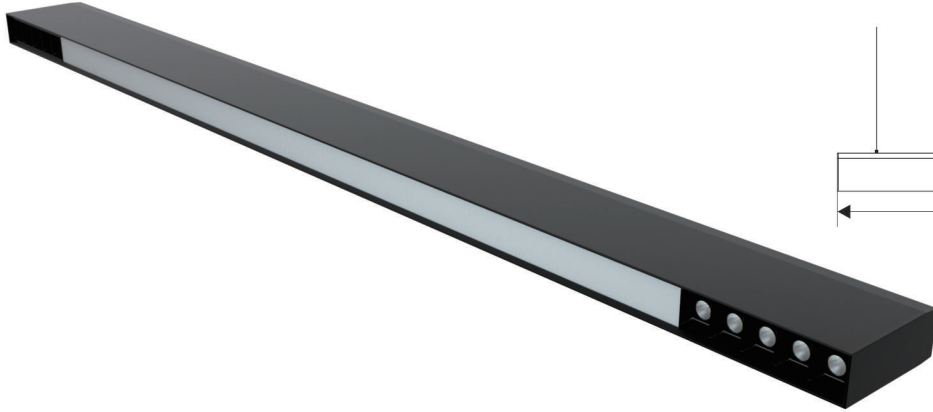

Parameters

Model	Power	LED Qty	Luminous Flux	Efficacy	Size
31800P3	36W	2835SMD/9V-1W/10LEDS 2835SMD/3V-0.2W/210LEDS	1872LM	52Lm/W	1204*38*100mm

Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.5
 CCT: 4000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 24° + 120°
 Main Material: Aluminum + PS
 Body Color: Sand Black
 Input Cable: 0.5mm²
 Installation: Suspended
 Protection: IP20
 Environment: -20°C ~ 50°C
 Longevity: 20000h
 Driver: 3AAA Constant Current

LUMILEDS
LED inside

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
38100P3	1.55kg	5	-	126*20*11.5cm

DETAILS

